

SUNNY BOY 3000US / 4000US

- > UL1741/IEEE 1547 compliant
- > 10 yr. standard warranty
- > Improved CEC efficiency
- > Integrated load-break rated DC disconnect switch
- > Integrated fused series string combiner
- > Sealed electronics enclosure & Opticool
- > Comprehensive SMA communications and data collection options
- > Ideal for residential or light commercial applications
- > Rugged cast aluminum outdoor rated enclosure



SUNNY BOY 3000US / 4000US

The best in their class

SMA is proud to introduce our new line of inverters updated with our latest technology and designed specifically to meet IEEE 1547 requirements. Compact design makes them ideal for residential use and the integrated DC disconnect makes installation more cost effective. They are field-configurable for positive ground systems making them more versatile than ever. Increased efficiency means better performance and shorter payback periods. With over 750,000 fielded units, Sunny Boy has become the benchmark for PV inverter performance and reliability throughout the world.




Technical Data

SUNNY BOY 3000US / 4000US

	SB 3000US	SB 4000US
Recommended Max. PV Power (Module STC)	3750 W	4357 W @ 208 V / 5000 W @ 240 V
Max. DC Voltage	500 V	600 V
Peak Power Tracking Voltage	175 - 400 V @ 208 V 200 - 400 V @ 240 V	220 - 480 V @ 208 V 250 - 480 V @ 240 V
DC Max. Input Current	17 A	18 A
DC Voltage Ripple	< 5%	< 5%
Number of Fused String Inputs	2 (inverter), 4 x 15 A (DC disconnect)	2 (inverter), 4 x 15 A (DC disconnect)
PV Start Voltage	228 V	285 V
AC Nominal Power	3000 W	3500 W @ 208 V / 4000 W @ 240 V
AC Maximum Output Power	3000 W	3500 W @ 208 V / 4000 W @ 240 V
AC Maximum Output Current	15 A @ 208 V, 13 A @ 240 V	17 A
AC Nominal Voltage / Range	183 - 229 V @ 208 V 211 - 264 V @ 240 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V
AC Frequency / Range	60 Hz / 59.3 Hz - 60.5 Hz	60 Hz / 59.3 Hz - 60.5 Hz
Power Factor	0.99 @ nominal power	0.99 @ nominal power
Peak Inverter Efficiency	96.5 %	96.8 %
CEC weighted Efficiency	95.0 % @ 208 V 95.5 % @ 240 V	95.5 % @ 208 V 96.0 % @ 240 V
Dimensions W x H x D in inches	17.8 x 13.8 x 9.3	17.8 x 13.8 x 9.3
Weight / Shipping Weight	84 lbs / 97 lbs	84 lbs / 97 lbs
Ambient temperature range	- 13 to +113 °F	- 13 to +113 °F
Power Consumption: standby / nighttime	< 7 W / 0.1 W	< 7 W / 0.1 W
Topology	Low frequency transformer, true sinewave,	Low frequency transformer, true sinewave,
Cooling Concept	OptiCool, forced active cooling	OptiCool, forced active cooling
Mounting Location Indoor / Outdoor (NEMA 3R)	● / ●	● / ●
LCD Display	●	●
Lid Color: aluminum / red / blue / yellow	● / ○ / ○ / ○	● / ○ / ○ / ○
Communication: RS485 / Wireless	○ / ○	○ / ○
Warranty: 10-year	●	●
Compliance: IEEE-929, IEEE-1547, UL 1741, UL 1998, FCC Part 15 A & B	●	●
Specifications for nominal conditions	● Included ○ Option – Not available	● Included ○ Option – Not available

Efficiency Curves

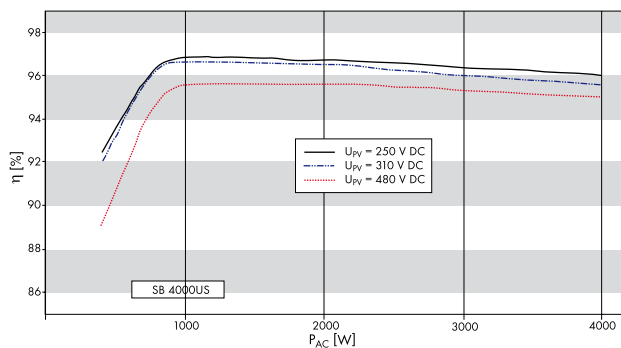

www.SMA-America.com
 Phone 916 625 0870
 Toll Free 888 4 SMA USA

SMA America, Inc.