




## SB/SC COMBINER BOXES

- > Greatly simplifies input and output wiring
- > Available in 6 to 52 circuit configurations
- > Compact, rugged low cost design
- > Reliable bus-work for efficient high current conductor combining
- > PV positive wires all land directly on Touch Safe™ fuse holders
- > Sturdy NEMA 3R/4 wall mount steel enclosure
- > ETL Listed to UL 1741

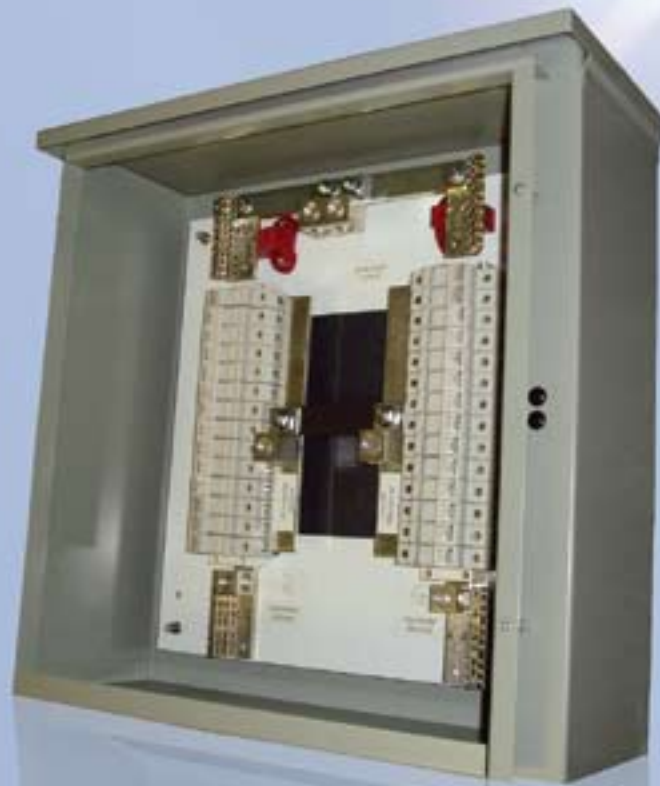

## SB/SC COMBINER BOXES

Simplify wiring for added convenience and safety

SMA America's SB/SC Combiner Boxes are available in sizes ranging from 6 to 52 PV inputs to provide greater flexibility and expandability in system design. Oversized bus-work adds high efficiency and dependability where it's needed most. The large NEMA 3R/4 enclosure provides ample room for conductors which reduces installation time. Designed with installers in mind, we know you'll find the SB/SC Combiner Boxes a welcome addition to our great line of inverter products.




# Technical Data SB/SC COMBINER BOX

	<b>SBCB-6 (Sunny Boy)</b>	<b>SCCB-12 (Sunny Central)</b>	<b>SCCB-28 (Sunny Central)</b>	<b>SCCB-52 (Sunny Central)</b>
Number of Inputs (Positive & Negative)	6	12	28	52
Positive Input Wire Size	10 to 6 AWG	10 to 6 AWG	10 to 6 AWG	10 to 6 AWG
Positive Input Terminal Torque	14 in-lb.	14 in-lb.	14 in-lb.	14 in-lb.
Negative Input Wire Size	10 to 6 AWG	10 to 6 AWG	10 to 6 AWG	10 to 6 AWG
Negative Input Terminal Torque	35 in-lb.	35 in-lb.	35 in-lb.	35 in-lb.
Output Wire Size	6 to 350 AWG	6 to 350 AWG	6 to 350 AWG	6 to 350 AWG
Output Terminal Torque	350 in-lb.	350 in-lb.	350 in-lb.	350 in-lb.
Max. Input Fuse Rating (Midget)	15 A, 600 VDC	20 A, 600 VDC	15 A, 600 VDC	8 A, 600 VDC
Max. Output Current	90 ADC	240 ADC	420 ADC	416 ADC
Max. Continuous Output Current	72 ADC	192 ADC	336 ADC	333 ADC
Max. Number of Output Wires	1 Pos, 1 Neg	2 Pos, 2 Neg	2 Pos, 2 Neg	2 Pos, 2 Neg
PV Array Configuration	Negative Grounded*	Negative Grounded*	Negative Grounded*	Negative Grounded*
Enclosure Type	NEMA3R, Steel	NEMA3R/4, Steel	NEMA3R/4, Steel	NEMA3R/4, Steel
Weight (Approximate)	11 lbs	48 lbs	56 lbs	70 lbs
Dimensions HxWxD (Inches)	10 x 8 x 6	16 x 16 x 6	20 x 20 x 8	42 x 30 x 8

Other sizes and designs available upon request.

\*Fusing available on positive or negative input, specify when ordering

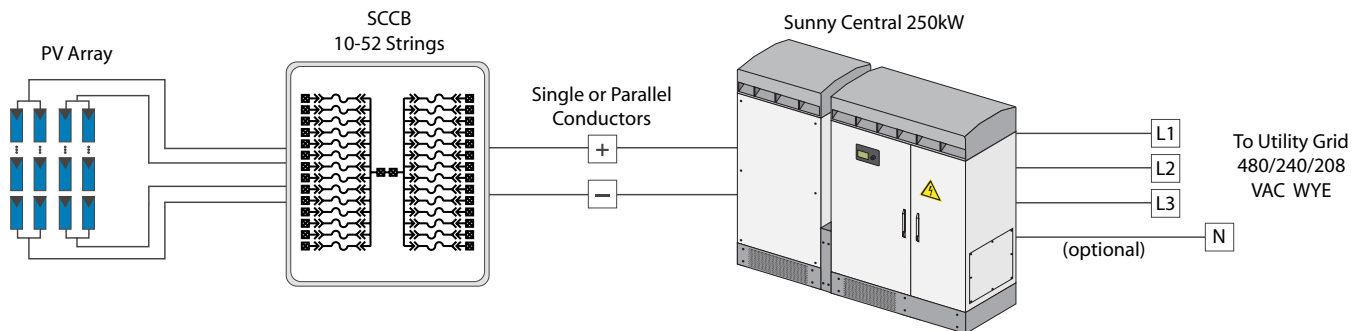

SMA's line of SB and SC Combiner Boxes is a culmination of many years of experience with the difficulties of combining large numbers of PV strings. This simple component has generally become known as a common point of failure in large PV arrays. The SMA design minimizes the number of components, resulting in the most robust, easy to install, low cost and reliable combiner boxes in the PV industry. PV wires are landed directly to individual Touch Safe™ fuse holders. The fuse holder outputs are combined into heavy-duty bus-bar combs where the output wires are connected to over-sized mechanical lugs. All wiring is routed in an orderly manner through the enclosure, minimizing the chance of shorting caused by pinched or abraded wires. Individual PV string circuit fuses may be safely de-energized and removed by opening the Touch Safe™ fuse holders. No special tools are required. Output wires may be paralleled, keeping wire sizes small and easy to pull through conduit. Combiner boxes may be paralleled to increase the total number of PV strings. The steel enclosure is rated for outdoor installations and all SMA combiner boxes are ETL listed to UL1741. Please call for availability of models not listed in the chart below or for special order configurations.